


Ottima™ 360°

Adjustable 8 Stream Drippers

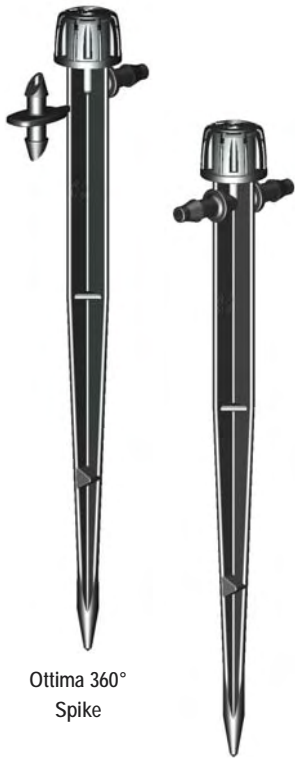

Ottima 360° Spike

Ottima 360° In-Line Spike



Ottima™ 360° 1/2" NPT Female Thread



Ottima™ 360° 4.5 mm Barb

Ottima™ 360° 10-32 UNF Thread

METRIC PERFORMANCE DATA				
DRIPPERS		PRESSURE (bar)	FLOW (l/h)	DIAMETER OF THROW (m)
	Adjustable to Maximum (approx) 20 Clicks	1.0	0 - 40	0 - 0.5
		1.5	0 - 50	0 - 0.6
		2.0	0 - 60	0 - 0.8
Tested 200 mm above Ground Level				
Recommended operating pressure 1.0 bar				

Rotation of the Ottima™ 360° cap allows simultaneous adjustment of flow rate and diameter of throw. This is made possible by the positive ratchet click action between the cap and the base. Easy to regulate. Increase or decrease the stream pattern or simply close off.

PRODUCT FEATURES

- Four base options available, 4.5 mm Barb, 10-32 UNF Male Thread, 1/2" NPT Female Thread and Spike.
- Cap rotation adjusts flow and radius.
- Large adjustment range gives a greater control of flow rate and diameter of throw compared to fixed flow emitters.
- Quick ON-OFF action.

GENERAL APPLICATIONS

- Use for watering plants in small or large pots, planter boxes and also shrubs and trees in garden beds and landscaped areas.



OTTIMA™ 360°						
PACKAGING						
		BARB	THREAD	SPIKE	IN-LINE SPIKE	1/2" THREAD
Order Codes	PACKS	200016	200026	200034	204294	202054
	BULK	020001	020002	020003	020429	020205
Quantity per Bag	PACKS	100	100	25	25	25
	BULK	1000	1000	1000	1000	250
Bags per Carton	PACKS	65	65	40	40	70
	BULK	7	7	1	1	7
Weight per Carton (kg)	PACKS	12.3	14.2	6.9	6.9	9.4
	BULK	12.9	14.9	6.7	6.7	9.0
Base Inlet Connection		4.5 mm Barb	10-32 UNF Thread	4.5 mm Barb	4.5 mm Barb	1/2" NPT/F Thread
Dimensions	HEIGHT	24 mm	24 mm	152 mm	152 mm	30 mm
	WIDTH	20 mm	20 mm	42 mm	38 mm	27 mm
Assembled	DEPTH	16 mm	16 mm	16 mm	16 mm	27 mm
	WEIGHT	1.7 g	2.0 g	5.7 g	5.5 g	4.6 g
Material UV Stabilized	CAP	Polypropylene				
	BASE	Polypropylene	Acetal	Polypropylene		

PERFORMANCE GRAPHS	
<p>Ottima™ 360° - Flow Rate</p>	<p>Ottima™ 360° - Diameter</p>